




Auto-Draft® Model FSAD12-230 with a UC1 Control (Fixed Speed)

PROJECT: _____

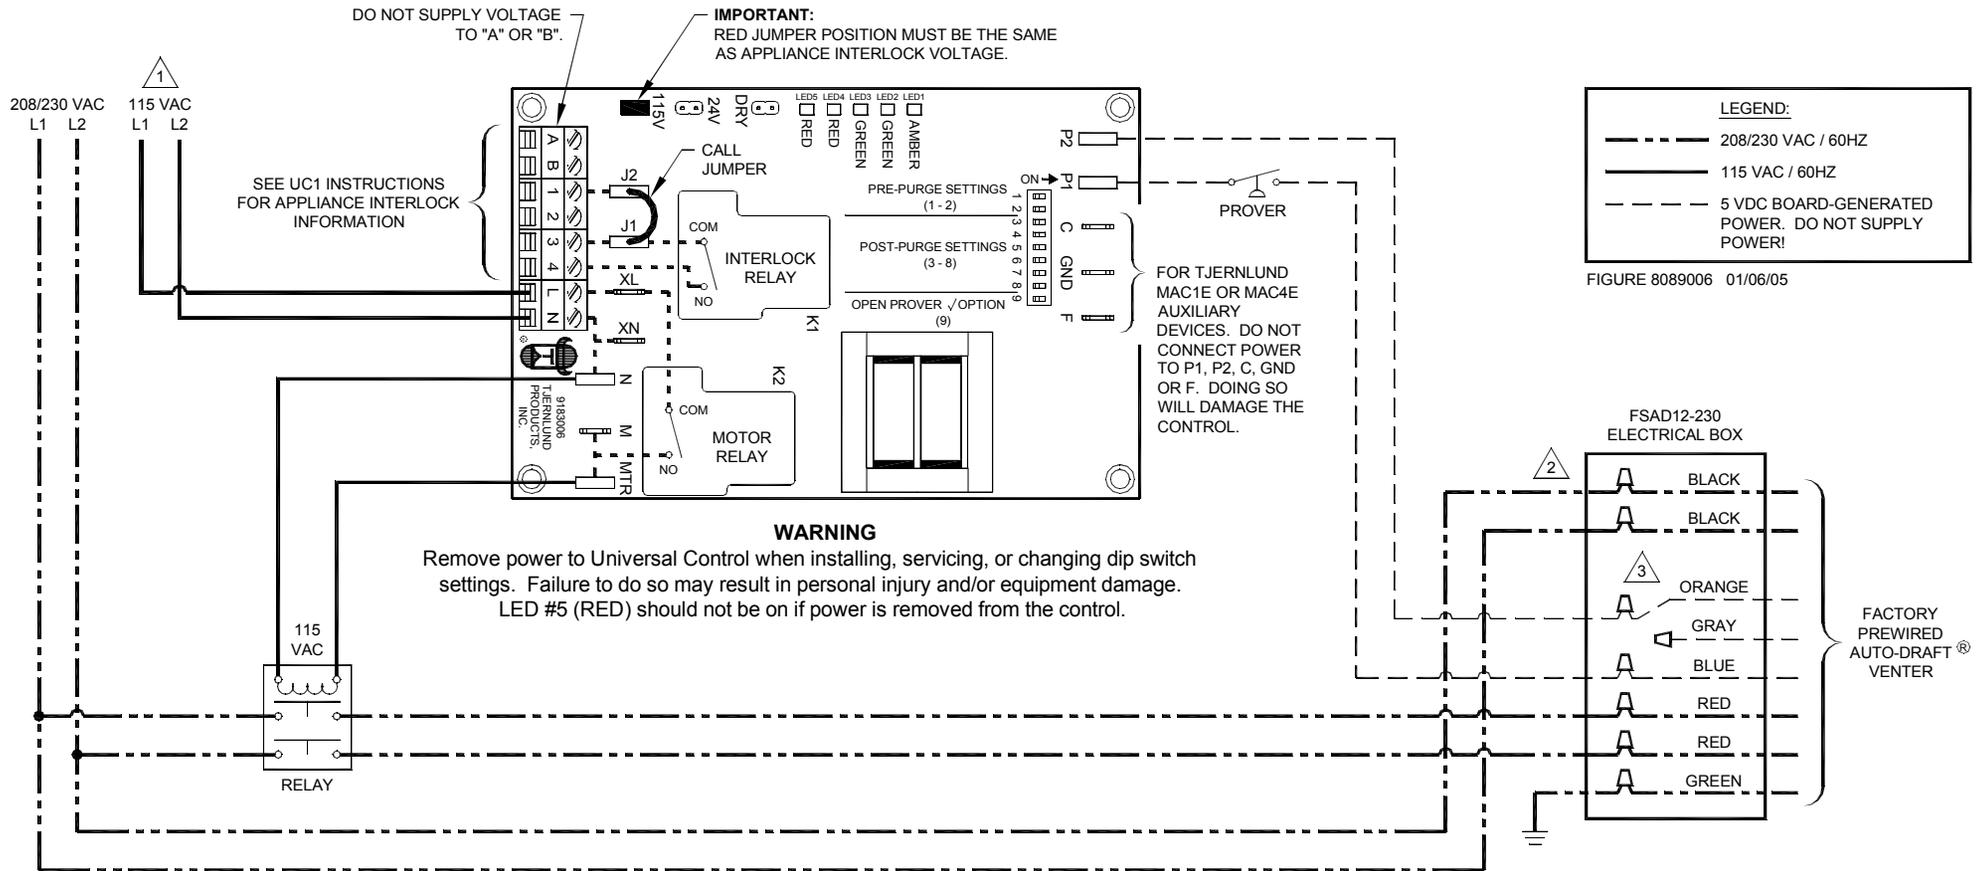

NOTES:

1. Verify that the input voltage matches the UC1 nameplate BEFORE applying power or severe damage will result.
2. 230 VAC FSAD has a 230 VAC cooling fan.
3. For vertical termination of the FSAD, connect to the orange wire and cap off the gray wire as shown.
For horizontal termination of the FSAD, connect to the gray wire and cap off the orange wire.

4. For appliance interlock, use UC1 instructions.
5. The disconnect means and circuit protection are to be provided by the installer.

IMPORTANT:
Perform a safety interlock and operational test as outlined in the installation manuals.