



Submittal Data Sheet

VSUB20 Variable Speed Universal Blower

Job Name: _____

Equipment Rep: _____

Contractor: _____

Prepared By: _____

Arch./Engr.: _____

Date: _____

Description:

The VSUB20 Variable Speed Universal Blower is suitable for providing combustion air or sidewall or vertically venting non-condensing (condensing applications require model VSUB20SS with stainless steel impeller) heating appliances, dryers and ovens. Can be installed indoors or outdoors.

Use with the MPC-Series Modulating Pressure Controllers, VFD and Pressure Sensor for an automatic-variable speed system which will modulate to always deliver the perfect amount of draft, combustion air or ventilation.

Housing Construction:

Constructed of 14-gauge, Type 316L stainless steel with continuous welds. The blower outlet rotates 180° for installation flexibility. The motor chassis slides away from the housing on polyethylene guides for easy motor and impeller access.

Impeller:

Backward inclined, high temperature coated, Class 1 impeller is both dynamically and statically balanced with permanently attached balancing weights.

Motor:

Three phase, 3 HP, 208-230/460 VAC, TEFC, EPACT High Efficiency Rated, arctic-duty, thermal overload protected, permanently lubricated and sealed ball bearing.

Standard Equipment:

- 4" x 4" weatherproof junction box with 4' conduit
- Square to round vent pipe adapter
- PSA-1 Fan Proving Switch
- FFP-1 Freeze and Fire Protection Limit (FFP-1 For combustion air applications only!)
- Condensate drain kit

Optional Controls:

- MPC Modulating Pressure Controller
- MPC1 Modulating Pressure Controller Interlocked
- MAC1E Multiple Appliance Control
- MAC4E Multiple Appliance Control
- IPS-1 Indoor Pressure Sensor with Decorative Cover
- VFD-Series Variable Frequency Drives

Temperature Rating:

U.S. and Canada 575°F / 300°C

Listings:

ETL # 56826
 UL 378 - Draft Equipment / Variable Speed
 UL 705 - Power Ventilators
 CSA-CAN3-B255-M81




Warranty:


2 year mechanical

Model VSUB20	208-230 Volt	460 Volt
Power hp	3	3
Amps A	8.8 - 8.2	4.1
Voltage VAC	3x208-230	3x460
Weight	370 Lbs. / 168 Kgs.	

	VSUB20
A	19 7/8"
B	14"
C	14 7/16"
D	15 1/8"
E	32 11/16"
F	19 11/16"
G	45 3/16"
H	47 3/16"
I	26 7/16"
J	27 15/16"
K	20 1/8"
L	33 1/2"
M	15 3/8"
N	23 7/16"
O	43 1/2"
P	10"

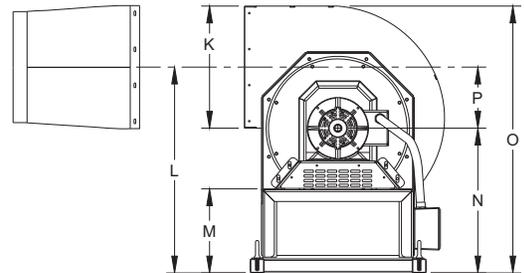

END VIEW

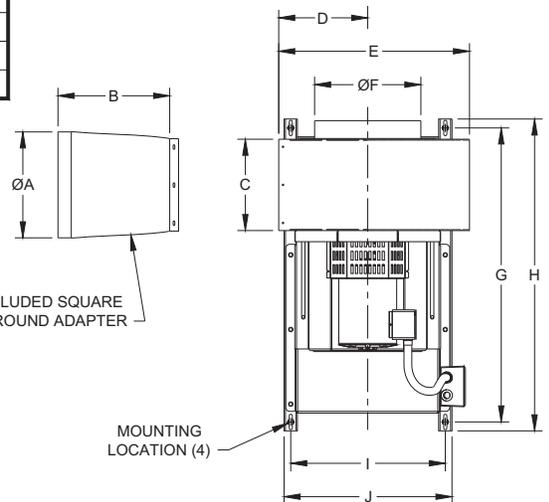

TOP VIEW

INCLUDED SQUARE TO ROUND ADAPTER

MOUNTING LOCATION (4)